



PIN HEADER 1.0mm H=1.0mm STACK STRAIGHT TYPE

SPECIFICATION

Current Rate:1 AMP
 Insulation Resistance:1000MΩ Min
 Contact Resistance:30mΩ Max
 Dielectric voltage:500V AC for one minute
 Operation Temperature:-40 °C to + 105°C


MATERIAL

Insulator:Polyester,UL 94V-0
 © Standard:Nylon 6T
 Contact Pin:Brass
 Contact Plated:Gold Plated

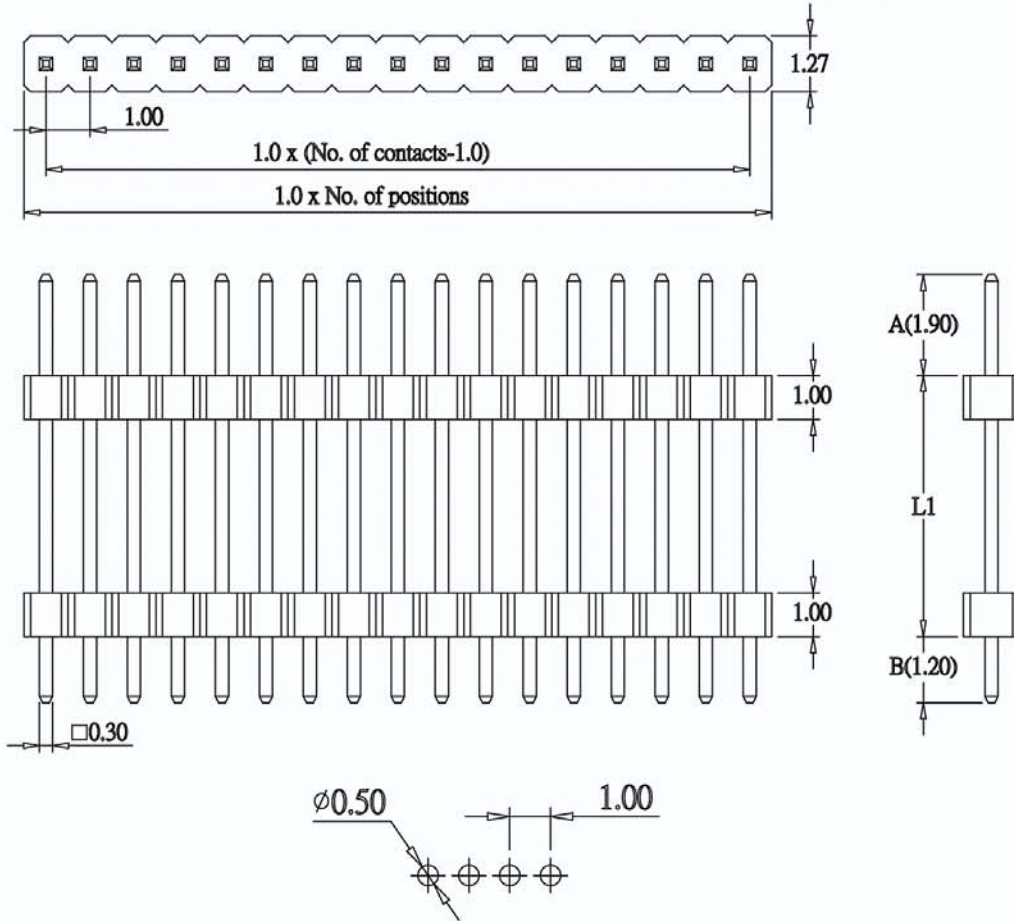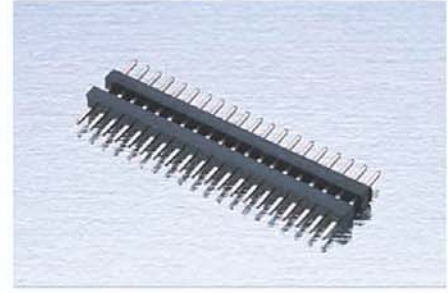

Recommended PCB Layout
 (PCB TOLERANCE ± 0.05)

ORDER INFORMATION

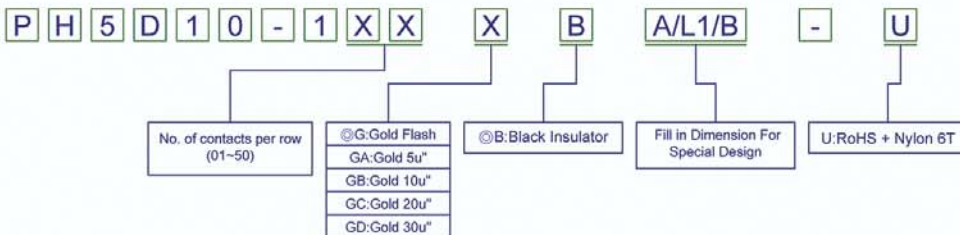

©:Standard Recommend