





# PIN HEADER 1.27mm SQ PIN=0.4mm H=0.85/1.0/1.5/1.7/2.0/2.5mm RIGHT ANGLE TYPE

## SPECIFICATION

Current Rate:1 AMP  
 Insulation Resistance:1000MΩ Min  
 Contact Resistance:20mΩ Max  
 Dielectric voltage:500V AC for one minute  
 Operation Temperature:-40 °C to + 105°C


## MATERIAL

Insulator:Polyester,UL 94V-0  
 ◎ Standard:Nylon 6T  
 Contact Pin:Brass  
 Finish:Tin, Gold Plated  
 ◎Standard:Gold Flash all over

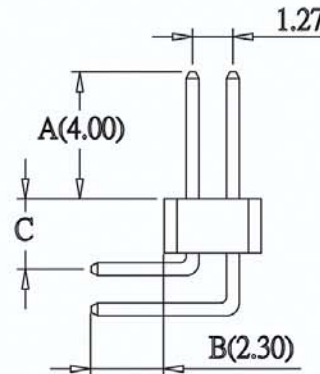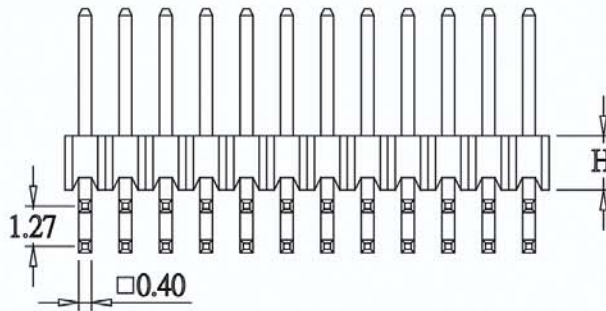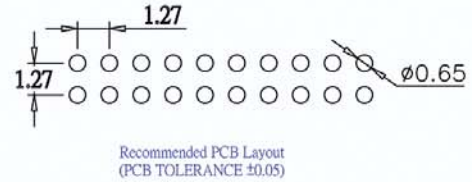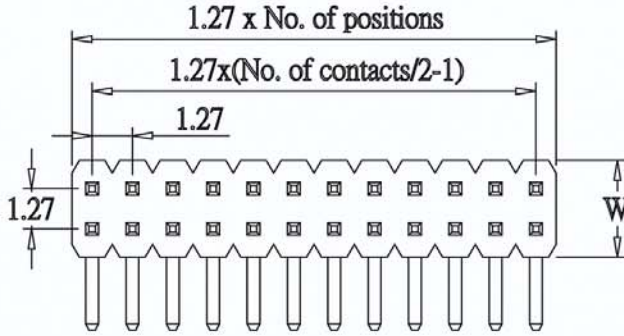

	C	W
H=0.85	1.30	3.40
H=1.0	1.50	3.40
H=1.5	2.00	3.40
H=1.7	2.20	3.00
H=2.0	2.50	3.00
H=2.5	3.00	3.00

## ORDER INFORMATION

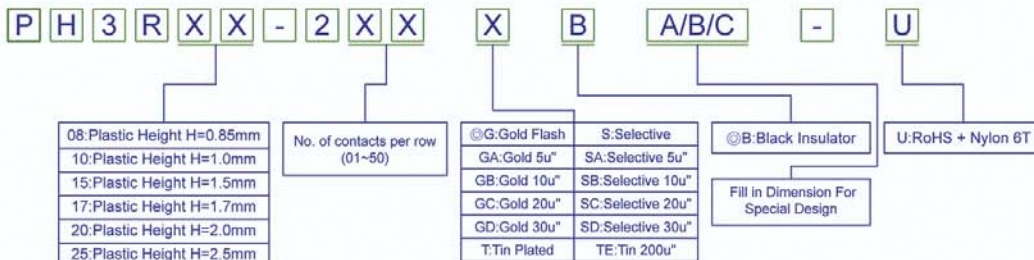

◎:Standard Recommend