






PIN HEADER 1.27mm SQ PIN=0.4mm H=0.85/1.0/1.5/1.7/2.0/2.5mm STRAIGHT TYPE

SPECIFICATION

Current Rate:1 AMP
 Insulation Resistance:1000MΩ Min
 Contact Resistance:20mΩ Max
 Dielectric voltage:500V AC for one minute
 Operation Temperature:-40 °C to + 105°C

MATERIAL

Insulator:Polyester,UL 94V-0
 © Standard:Nylon 6T
 Contact Pin:Brass
 Finish:Tin, Gold Plated
 ©Standard:Gold Flash all over

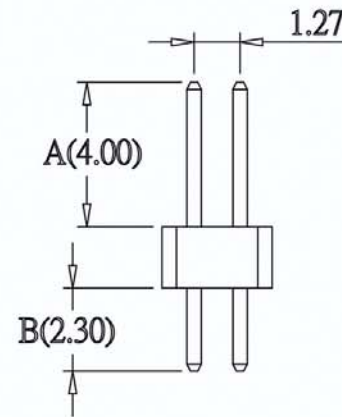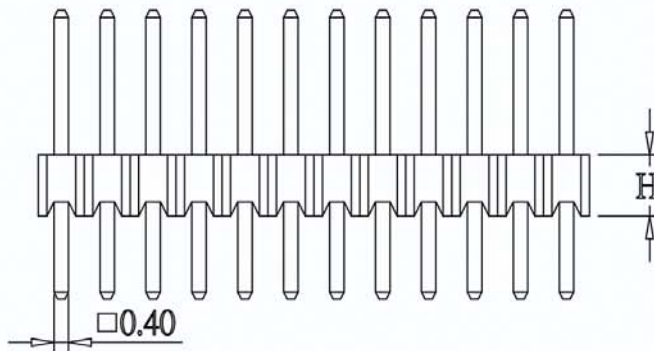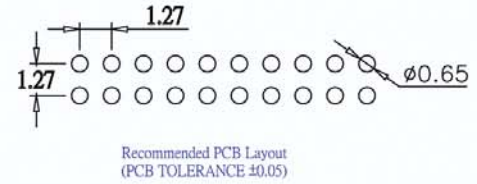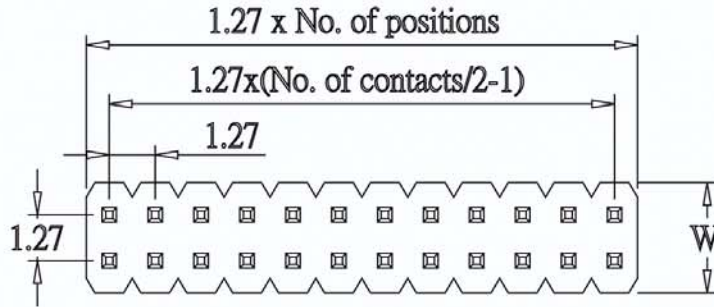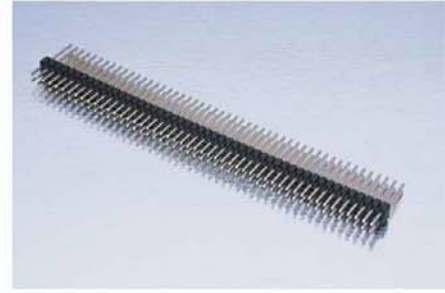

	W
H=0.85	3.40
H=1.0	3.40
H=1.5	3.40
H=1.7	3.00
H=2.0	3.00
H=2.5	3.00

ORDER INFORMATION

