



PIN HEADER 1.27mm SQ PIN=0.46mm H=1.7/2.5mm SMT TYPE

SPECIFICATION



Current Rate:1 AMP
Insulation Resistance:1000MΩ Min
Contact Resistance:20mΩ Max
Dielectric voltage:500V AC for one minute
Operation Temperature:-40 °C to + 105°C

MATERIAL

Insulator:Polyester,UL 94V-0
© Standard:Nylon 6T
Contact Pin:Brass
Finish:Tin, Gold Plated
©Standard:Gold Flash all over

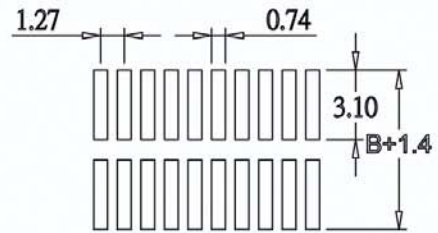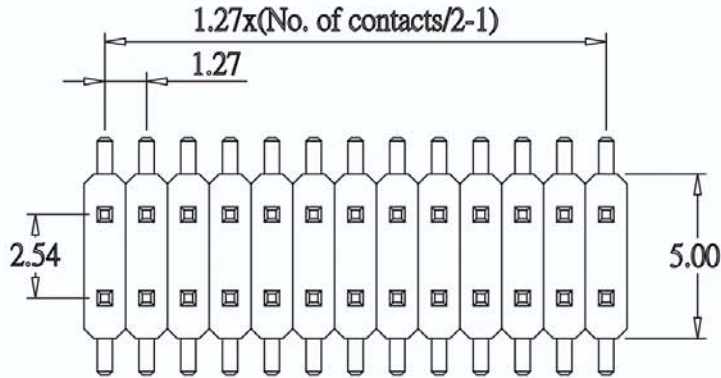

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

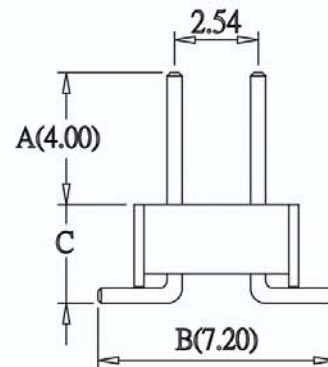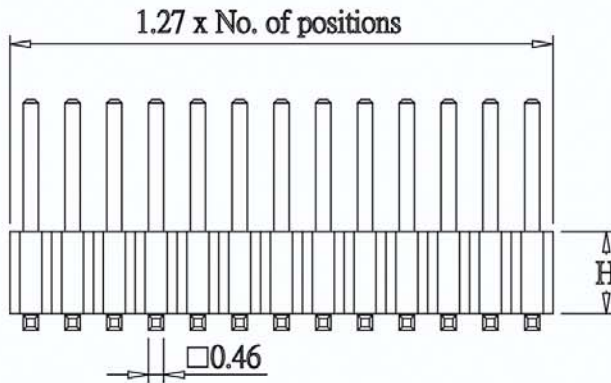

	C
H=1.7	2.20
H=2.5	3.00

ORDER INFORMATION

